


20 TOP









CE EN60974-7



















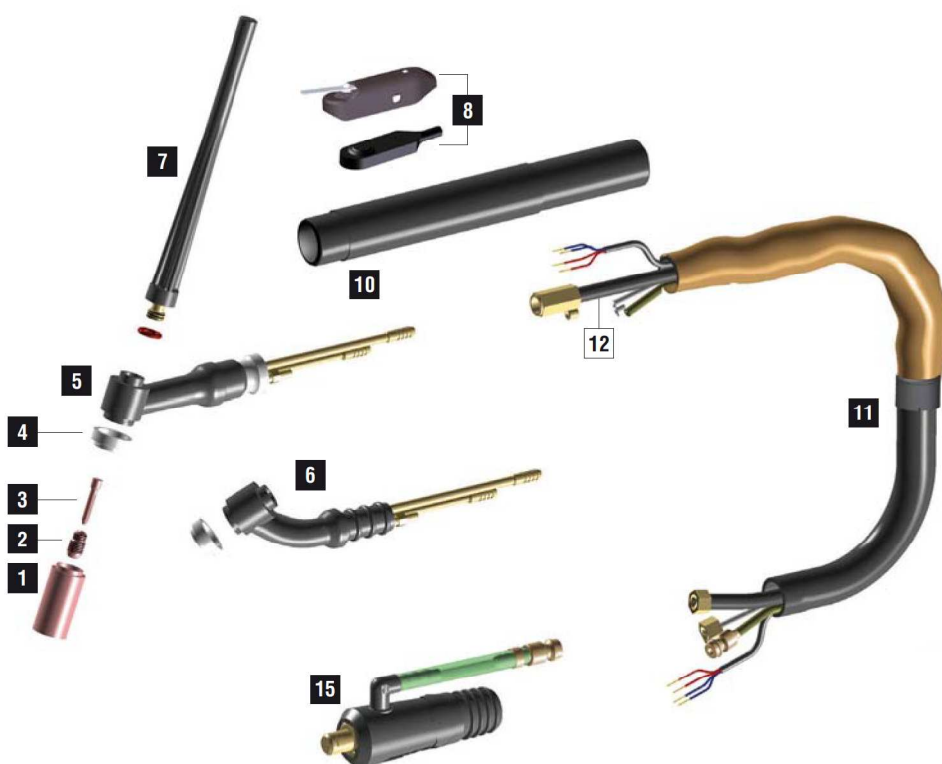


CODE	↔	⚡	⚡
------	---	---	---







HU6437-10	4 m	12.5'	lamelle flex	 TSK 50-M12x1
HU6837-10	8 m	25'	lamelle flex	
HV6437-10	4 m	12.5'	lamelle	
HV6837-10	8 m	25'	lamelle	

TECHNICAL DATA	
----------------	--


	
	0,85 kg 1.87 lb
V PEAK	113
	Argon
	0,5 ÷ 3,2 mm .020" ÷ 1/8"
X 100%	250A DC - 220A AC
	4 bar
	1.5 l/min



	CODE		Gr	Ø		↔	REF	
1	TC0012		4	6,4 mm	1/4"	30 mm	13N08	10
1	TC0013		5	8 mm	5/16"	30 mm	13N09	10
1	TC0014		6	9,8 mm	3/8"	30 mm	13N10	10
1	TC0015		7	11,2 mm	7/16"	30 mm	13N11	10
1	TC0016		8	12,7 mm	1/2"	30 mm	13N12	10
1	TC0017		10	15,7 mm	5/8"	30 mm	13N13	10
1	TC0096		4	6,5 mm	1/4"	48 mm	796F71	10
1	TC0097		5	8 mm	5/16"	48 mm	796F72	10
1	TC0098		6	9,5 mm	3/8"	48 mm	796F73	10
1	TC0101		4	6,5 mm	1/4"	63 mm	796F75	10
1	TC0102		5	8 mm	5/16"	63 mm	796F76	10
1	TC0103		4	6,5 mm	1/4"	89 mm	796F79	10
2	TE0003-05			0,5 mm	.020"	21 mm	13N25	10
2	TE0003-10			1,0 mm	.040"	21 mm	13N26	10
2	TE0003-16			1,6 mm	1/16"	21 mm	13N27	10
2	TE0003-20			2,0 mm	5/64"	21 mm	-	10
2	TE0003-24			2,4 mm	3/32"	21 mm	13N28	10
2	TE0003-32			3,2 mm	1/8"	21 mm	13N29	10
3	TD0003-05			0,5 mm	.020"	25 mm	13N20	10
3	TD0003-10			1,0 mm	.040"	25 mm	13N21	10
3	TD0003-16			1,6 mm	1/16"	25 mm	13N22	10
3	TD0003-20			2,0 mm	5/64"	25 mm	-	10
3	TD0003-24			2,4 mm	3/32"	25 mm	13N23	10
3	TD0003-32			3,2 mm	1/8"	25 mm	13N24	10
7	BW0063					147,5 mm	41V24	10
7	BW0064					53 mm	41V35	10
7	BW0065					17,5 mm	41V33	10
7	EA0129							10

	CODE			
4	TQ0001		insulator	10
5	TG0020		tig torch head	1
6	TG0220		tig torch head flex	1
8	TT0176		gachette à lamelle	1
10	TP0007		tig handle	1
15	CX0080		tig plug 50 – gas quick conn.	

	CODE	CABLE	
11	TH0232	4 m / 12.5'	1
11	TH0233	8 m / 25'	1
↔			
12	TH0334	4 m / 12.5'	
12	TH0335	8 m / 25'	

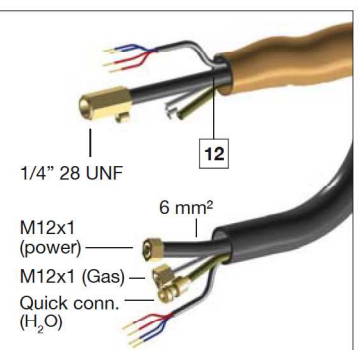

FOR ALL CONSUMABLES SEE PAGE 469